

MC2 D/I KIT 1.2M 3K DALI WHT PRIS

Item No: 2071461


Concord



MC2-KIT D/I 1.2M 3K DALI WHT PRIS LED luminaire, white RAL9016 finishing, direct/indirect distribution (65/35), suspended kit version is pre-wired and supplied complete with end caps and suspension cables, compact and minimalist design based on the Golden Mean, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, extruded aluminium body, diffuser: micro prismatic, colour temperature: 3000K warm white, total system power: 29W, total fixture output: 3750lm, luminaire efficacy: 129lm/W, LOR: 100%, colour rendering: Ra >80, LED Chromacity: 3 step MacAdam ellipse, lifespan: 66,000 hours L90B10, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: (Direct) 800mA + (Indirect) 350mA, electronic driver, DALI dimmable, direct/indirect independently addressable, electrical protection: CLASS I, IP20, suitable for internal environment only.

Technical Assets


Dimensions (mm)

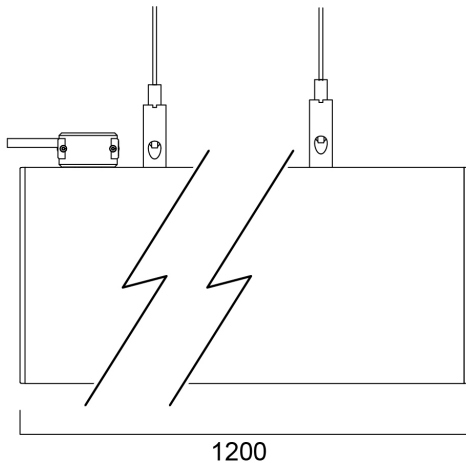

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Beam angle [°]	Beam angle [°]
0.5	0.55 0.65	0.55 0.65	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°
1.0	1.10 1.30	1.10 1.30	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°
1.5	1.65 2.05	1.65 2.05	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°
2.0	2.20 2.74	2.20 2.74	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°
2.5	2.75 3.42	2.75 3.42	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°
3.0	3.30 4.11	3.30 4.11	43.8° 51.4°	43.8° 51.4°	43.8° 51.4°

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 65.8°)
C90 - C270 (Half beam angle: 57.0°)



MC2 D/I KIT 1.2M 3K DALI WHT PRIS

Item No: 2071461

Concord

General data

Product name	MC2 D/I KIT 1.2M 3K DALI WHT PRIS
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Built in presence detector	NONE
General application	Office, Education, Retail
Operating temperature range (°C)	1°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001743
E-number FI	4170300
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3750
Luminaire efficacy (lm/W)	129
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Emergency type	
Total power consumption (W)	29
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Min. drive current (mA)	350
Max. drive current (mA)	1050
Drive current - Range (mA)	350mA / 1050mA
Inrush Current (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	1.5

MC2 D/I KIT 1.2M 3K DALI WHT PRIS

Item No: 2071461

Concord

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	92500
Lifespan L90 B10	66000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1200
Nominal Product Width (mm)	54
Nominal Product Height (mm)	86
Weight (kg)	3.2

Packaging

Product EAN number	5025768714612
Packaging single length / height (cm)	121.0
Packaging single width (cm)	11.0
Packaging single depth (cm)	11.0
DUN14 (inner)	05025768714612
Units per outer package	1
Packaging outer length / height (cm)	121.0
Packaging outer width (cm)	11.0
Packaging outer depth (cm)	11.0

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-40