

# LSF EM PACK DAST 6-54V LIFEPO4 3H3W RC


Item No: 9146603



LiFeSafe Emergency conversion Kit Rapid Connector (RC) is a luminaire accessory designed to enable your general lighting to be able to offer light output even in emergency situations through a battery backup pack. This kit comes with Rapid connectors to be compatible with Sylvania luminaires with a Rapid Connector for low voltage 6-54V LED board. This product contains a DALI/Self-Test auto-switching emergency test inverter (Connect DALI = DALI mode, No DALI connection = Auto-test) pre-wired with rapid connectors, LED bi-colour indicator, Two indicator holders (in-ceiling and in-luminaire) and a LiFePO4 battery pack to deliver 3W, 3 hours of light output. Please note this is not compatible with luminaires without rapid connector and note this pack is not EN60598-2-22 compliant alone and must be used in conjunction with a tested and approved luminaire. Emergency lighting design calculations as well as a risk assessment must be undertaken by the responsible person. Spare battery available on code 9146610 (E55-4AH)

## Technical Assets

### Dimensions (mm)

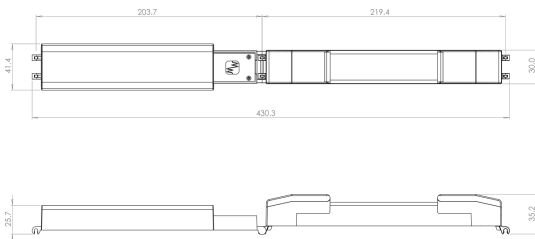

### Photometrics

# LSF EM PACK DAST 6-54V LIFEPO4 3H3W RC

Item No: 9146603

## General data

Product name	LSF EM PACK DAST 6-54V LIFEPO4 3H3W RC
Technology	Emergency Pack
General application	Education, Hospitality, Logistics & Industry, Office, Retail
Operating temperature range (°C)	0°C...+55°C
ETIM Class	EC000471
E-number FI	4289258
Warranty	6 years

## Electrical data

Emergency mode	Non-Maintained
Emergency type	
Emergency duration (h)	3
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.6
Electrical protection	Class II
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

## Physical data

Housing colour	White
Nominal Product Length (mm)	423.1
Nominal Product Width (mm)	41.4
Nominal Product Height (mm)	35.2
Weight (kg)	0.31

## Packaging

Product EAN number	3172670466039
Packaging single length / height (cm)	28.2
Packaging single width (cm)	9.3
Packaging single depth (cm)	4.0
Units per outer package	1
Packaging outer length / height (cm)	28.2
Packaging outer width (cm)	9.3
Packaging outer depth (cm)	4.0

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	0-55
Dry applications use only	Yes