

ROUTELED 3W OPEN AREA WHT S/TEST

Item No: 9154068


Concord



Stand alone emergency luminaire downlight with Self Test facility. Includes Corridor lens, module (inverter) with 3.6v 4ah Ni-Cad batteries. 24hr recharge time. 1000mA discharge current. 700mA output current. Module size is 152x26.5x28.5mm - battery size is 38x270mm (Type 8). Module weight 150gm/battery weight 400gm.

Technical Assets

Dimensions (mm)

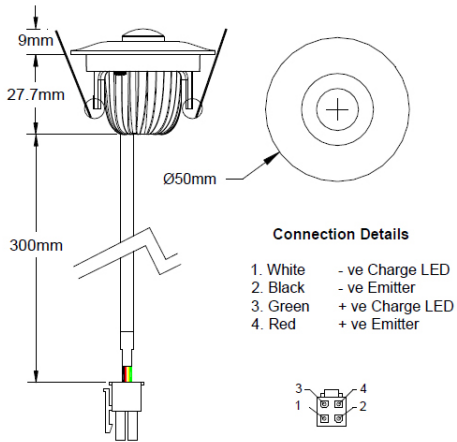

Photometrics

ROUTELED 3W OPEN AREA WHT S/TEST

Item No: 9154068

Concord

General data

Product name	ROUTELED 3W OPEN AREA WHT S/TEST
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC001957
Warranty	3 years

Optical data

Fixture luminous flux (lm)	207
Correlated colour temperature (k)	6000
Light colour	Daylight
Adjustable chromaticity	N
Beam Angle (°)	110

Electrical data

Emergency mode	Non-maintained
Emergency duration (h)	3
Drive current (mA)	700

Physical data

IP rating	IP20
Weight (kg)	1.1
Recessed Depth (mm)	40

Packaging

Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	5.0
Units per outer package	1
Packaging outer length / height (cm)	20.0
Packaging outer width (cm)	20.0
Packaging outer depth (cm)	5.0