
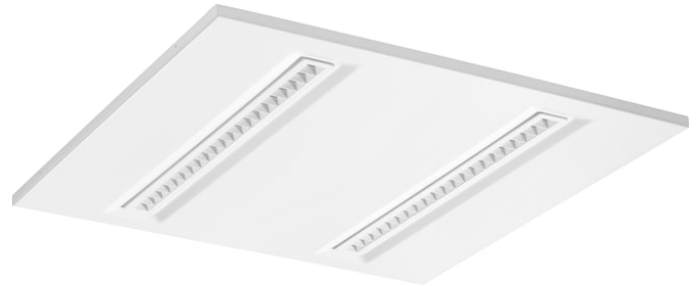


# OptiClip 600 3000K C8 HO WH DALI WHITE

Item No: 0043005

**SYLVANIA**


**PRO**<sup>TM</sup>

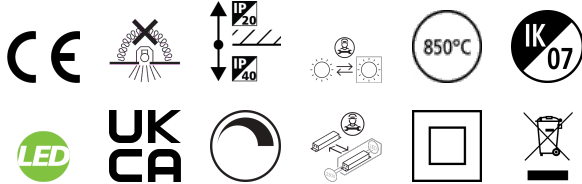

OPTICLIP 600 3000K C8 HO WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3925lm luminous flux, 33W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m2, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

## Technical Assets

### Dimensions (mm)

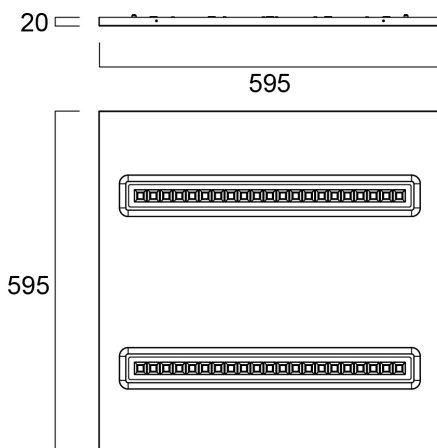

### Photometrics

Distance [m]	Cone diameter [m]	E17%	E10%	E1%	U0
0.5	0.81 0.83	507°	503°	500°	9431
1.0	1.61 1.67	507°	503°	500°	2385
1.5	2.42 2.50	507°	503°	500°	1048
2.0	3.23 3.33	507°	503°	500°	598
2.5	4.03 4.17	507°	503°	500°	377
3.0	4.84 5.00	507°	503°	500°	282

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 78.9°)    — C90 - C270 (Half beam angle: 77.8°)

