
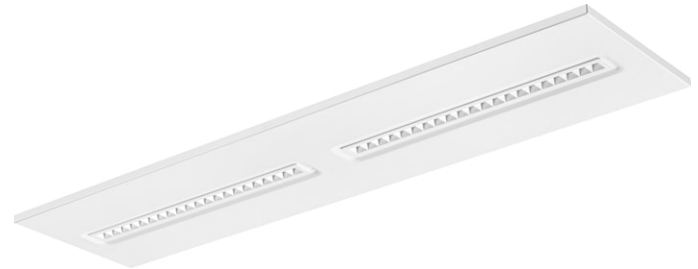


# OptiClip 1200 3000K C8 WH DALI WHITE

Artikelnummer 0044013

**SYLVANIA**


**PRO**<sup>TM</sup>

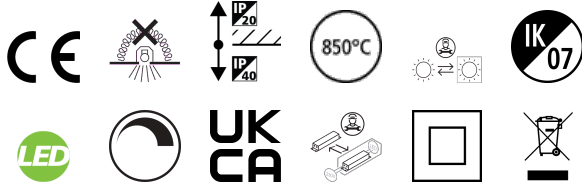

OPTICLIP 1200 3000K C8 WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

## Technische Werte

### Größe (mm)

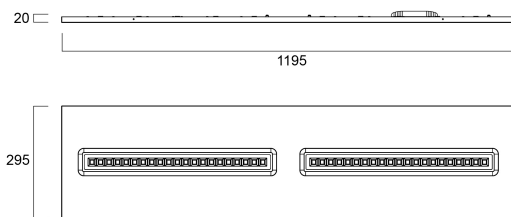

### Photometrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.85 0.92	80°	40.2"	15.8"	720
1.0	1.68 1.65	80°	40.2"	15.8"	181
1.5	2.54 2.47	80°	40.2"	15.8"	80
2.0	3.36 3.30	80°	40.2"	15.8"	45
2.5	4.23 4.12	80°	40.2"	15.8"	29
3.0	5.07 4.95	80°	40.2"	15.8"	19

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 78.9°)  
 — C90 - C270 (Half beam angle: 80.4°)

