

SYLSMART STANDALONE PWM4 LR SSC

Artikelnummer 9041544


SYLVANIA



SylSmart SSC PWM4 is a Bluetooth controllable, four channel PWM dimmer for constant voltage LED loads, such as LED strips and constant voltage LED modules. Connected between a 12-24 VDC power supply and the constant voltage LED load, CBU-PWM4 can control up to four channels making it an ideal partner for RGBW and tunable white (TW) applications. The maximum combined output current is 6 A which can be freely divided between 1 -4 channels. Note: Device must be configured using the SylSmart Standalone App sto select the mode of operation.

Technische Werte

Größe (mm)

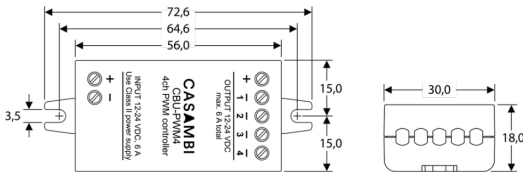

Photometrie

Allgemeine Daten

Produktname	SYLSMART STANDALONE PWM4 LR SSC
Technologie	Electronic Device
Allgemeine Anwendungsbereiche	Hospitality, Museums & Galleries
Umgebungstemperaturbereich	-20°C...+45°C
ETIM Klasse	N/A
Garantie	5 Jahre

Elektrische Daten

Primary Supply/Product voltage - min (V)	12.0
Primary Supply/Product voltage - max (V)	24.0
Dimmbar	Yes
Dimming method	SylSmart Standalone (SSC)
Max. drive current (mA)	4
Drive current - Range (mA)	/ 4mA
Nennfrequenz (Hz)	50/60Hz

SYLSMART STANDALONE PWM4 LR SSC

Artikelnummer 9041544



Physikalische Daten

Länge (mm)	68
Breite (mm)	30
Nominale Produkthöhe (mm)	18
Gewicht (kg)	0.023

Packaging

Einzelverpackung Länge (cm)	7.3
Einzelverpackung Breite (cm)	3.0
Einzelverpackung Tiefe (cm)	1.8
Anzahl an Einheiten je Außenverpackung	120
Außenverpackung Länge (cm)	38.0
Außenverpackung Breite (cm)	29.0
Außenverpackung Tiefe (cm)	19.2

Safety data

Optimale Betriebstemperatur (°C)	-20-45
----------------------------------	--------