

ToLEDo CANDLE V6 250LM 865 E14 SL

Item No: 0026972


SYLVANIA



- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent candle lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- A+ energy rating

Technical Assets

Dimensions (mm)

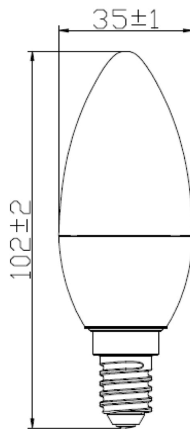

Photometrics

ToLEDo CANDLE V6 250LM 865 E14 SL

Item No: 0026972

SYLVANIA

General data

Product name	ToLEDo CANDLE V6 250LM 865 E14 SL
Technology	LED
Watt (Rated) (W)	3
Cap/Base	E14
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4740506
Warranty	3 years

Optical data

Useful luminous flux (Φ _{use})	250
Luminous flux (Rated) (lm)	250
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Beam Angle (°)	180
Lumen maintenance at end of nominal life (%)	70

Electrical data

Power consumption (W)	3
Wattage (W)	3
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Lamp power factor	0.4
No. Of switching cycles before premature failures	>50000
Inrush Current (A)	2
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	178
Max. products per 16A C Breaker	286
Max. products per 20A C Breaker	358

Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

Physical data

Nominal Product Length (mm)	104
Nominal Product Diameter (mm)	35
Weight (kg)	0.027

Packaging

Product EAN number	5410288269726
Packaging single length / height (cm)	11.7
Packaging single width (cm)	4.8
Packaging single depth (cm)	4.8
DUN14 (inner)	15410288269723
Units per inner package	6
Packaging inner length / height (cm)	15.5
Packaging inner width (cm)	10.5
Packaging inner depth (cm)	13.4
DUN14 (outer)	25410288269720
Units per outer package	60
Packaging outer length / height (cm)	55.0
Packaging outer width (cm)	32.6
Packaging outer depth (cm)	15.4

Safety data

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures