

SylSafe Exit EX C EM3 MT DA

Item No: 0041748

SYLVANIA


LiFeSafe™



SylSafe Exit EX C EM3 MT MS is a surface mounted emergency exit sign. Rotateable legend for wall / ceiling mounting applications. Comes with ISO7010 compliant legend pack. Arrows left, right, up, down and a blank sheet for single sided versions. EC legend pack is available as accessory. Viewing distance 26m. White housing colour. Maintained 3hr emergency operation with NiMH rechargeable battery. Recharge period 24 hours. Self testing with DALI monitoring capability. 2.2W, IK03, IP20. Power Factor 0.6. Class II electrical construction.

Technical Assets

Dimensions (mm)

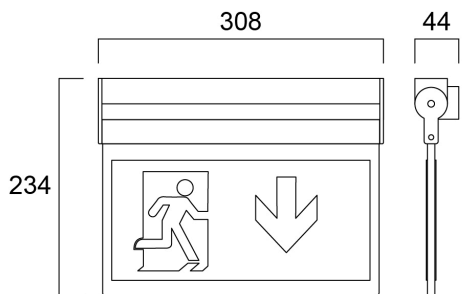

Photometrics

SylSafe Exit EX C EM3 MT DA

Item No: 0041748

SYLVANIA

General data

Product name	SylSafe Exit EX C EM3 MT DA
Technology	LED
Mount	Ceiling surface mounting
General application	Office, Hospitality, Retail, Museums & Galleries, Education, Logistics & Industry
ETIM Class	EC001957
Warranty	5 years

Optical data

Fixture luminous flux (lm)	-
Correlated colour temperature (k)	5700
CRI (Ra)	80
Luminous flux (emergency) (lm)	280

Electrical data

Emergency duration (h)	3
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.6
Electrical protection	Class II
Control gear required	Yes
Drive current (mA)	18
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Nominal Product Length (mm)	308
Nominal Product Width (mm)	18
Nominal Product Height (mm)	234
Weight (kg)	0.866

Packaging

Product EAN number	5410288417486
Packaging single length / height (cm)	31.0
Packaging single width (cm)	22.6
Packaging single depth (cm)	4.4
DUN14 (inner)	05410288417486
Units per outer package	1
Packaging outer length / height (cm)	31.0
Packaging outer width (cm)	22.6
Packaging outer depth (cm)	4.4