

LED PIPE G2 L600 HIGH OUTPUT NW

Item No: 0051047


SYLVANIA




LED T5 replacement batten, high output range: more lumens per meter with efficiency up to 125 lum/watt, seamless linking (up to 10M), Ideal for direct lighting such as under cabinet or in kitchens, 150 degree beam angle, includes switch, includes 0.30m stripped cable, white polycarbonate body, includes standard and tilting brackets

Technical Assets

Dimensions (mm)

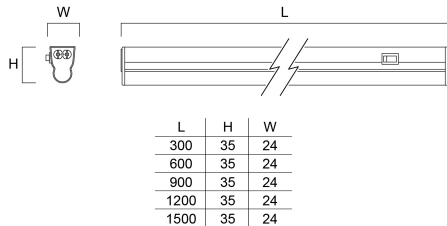

Photometrics



General data

Product name	LED PIPE G2 L600 HIGH OUTPUT NW
Technology	LED
Housing	PC Polycarbonate
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number SE	7505154
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	116
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0

LED PIPE G2 L600 HIGH OUTPUT NW

Item No: 0051047

SYLVANIA

Electrical data

Total power consumption (W)	9
Lamp power factor	0.9
Electrical protection	Class II
Dimmable	No
Drive current (mA)	125
Inrush Current (A)	2
Inrush Duration (µs)	50
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	16
Max. products per 13A C Breaker	21
Max. products per 16A C Breaker	25
Max. products per 20A C Breaker	25
Max. products per 10A B Breaker	10
Max. products per 13A B Breaker	13
Max. products per 16A B Breaker	16
Max. products per 20A B Breaker	20

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	600
Nominal Product Width (mm)	24
Nominal Product Height (mm)	35
Weight (kg)	0.188

Packaging

Product EAN number	5410288510477
Packaging single length / height (cm)	4.1
Packaging single width (cm)	3.2
Packaging single depth (cm)	72.0
DUN14 (inner)	15410288510474
Units per outer package	20
Packaging outer length / height (cm)	74.0
Packaging outer width (cm)	18.5
Packaging outer depth (cm)	19.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------