
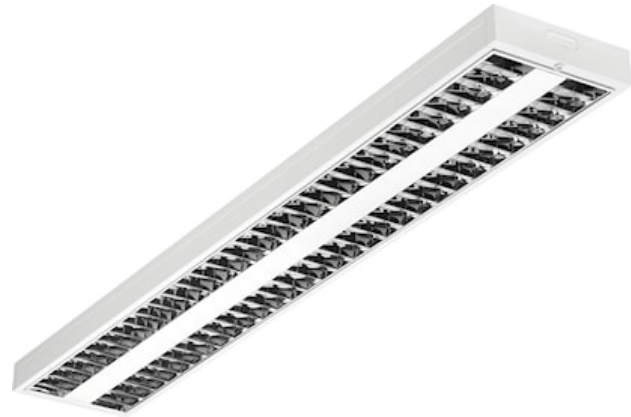


# RANA NEO 9500LM S 1500 840 CC EM 2L WHITE

Item No: 0054265

**SYLVANIA**


**PRO**<sup>TM</sup>

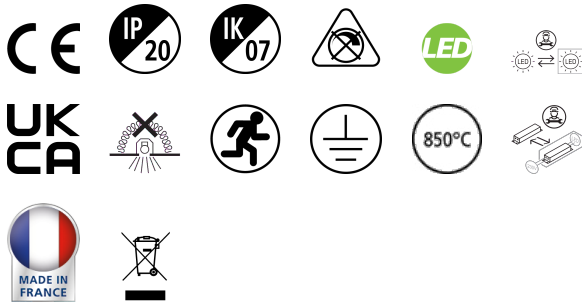

Surface or Suspended LED luminaire with Micro Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1447x187x56mm, White body colour, IP20, IK07, Constant Current, Emergency 3 hours, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 9500lm, 72W, 131lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 3000 cd/m2, Lifespan: 96,000 hours L80B20, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

## Technical Assets

### Dimensions (mm)

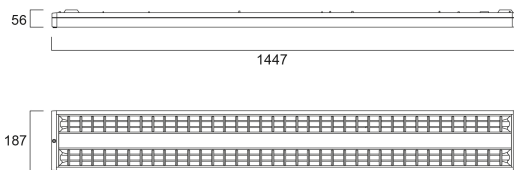

### Photometrics

Distance [m]	Cone diameter [m]	E107	E100	E100	E100	Beam angle [°]	Beam angle [°]	Beam angle [°]	Beam angle [°]	Illuminance [lx]
0.5	0.90 0.66	5171	2130	2545	2570	41.9°	34.4°	34.4°	34.4°	758
1.0	1.79 1.37	6371	2130	1317	1317	41.9°	34.4°	34.4°	34.4°	179
1.5	2.68 2.05	2332	2130	888	888	41.9°	34.4°	34.4°	34.4°	80
2.0	3.58 2.74	1590	2130	666	666	41.9°	34.4°	34.4°	34.4°	60
2.5	4.48 3.42	1219	2130	511	511	41.9°	34.4°	34.4°	34.4°	48
3.0	5.38 4.11	1000	2130	416	416	41.9°	34.4°	34.4°	34.4°	40

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 69.9°)  
— C90 - C270 (Half beam angle: 69.9°)



# RANA NEO 9500LM S 1500 840 CC EM 2L WHITE

Item No: 0054265

**SYLVANIA**

## General data

Product name	RANA NEO 9500LM S 1500 840 CC EM 2L WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Built in presence detector	NONE
General application	Office, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	9500
Luminaire efficacy (lm/W)	132
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	80

## Electrical data

Emergency mode	Non-maintained
Emergency type	
Emergency duration (h)	3
Total power consumption (W)	78
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	300
Inrush Current (A)	45
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	C, C(more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	31
Max. products per 16A C Breaker	51
Max. products per 20A C Breaker	62
Max. products per 10A B Breaker	18
Max. products per 16A B Breaker	30
Max. products per 20A B Breaker	37
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	96000

# RANA NEO 9500LM S 1500 840 CC EM 2L WHITE

Item No: 0054265

**SYLVANIA**

## Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1440
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	3.9

## Packaging

Product EAN number	5410288542652
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288542652
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-25