

CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W

Item No: 2064636


Concord



CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W is a linear luminaire for suspended mounting with 3 meter pre-wiring and complete with end caps and suspension cables, direct/indirect light distribution (60/40 ratio), compact and minimalist design, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, white (RAL9016) finishing, extruded aluminium body, 1294x56x93mm dimensions, prismatic diffuser combined with lenses, 4000K (neutral white) colour temperature, total system power: 37W, total fixture output: 5350lm, luminaire efficacy: 145lm/W, colour rendering: Ra >90, LED Chromacity: 3 step MacAdam ellipse, lifespan: 89,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, SylSmart® Connected enabled, direct/indirect independently addressable, Class I electrical protection, IP20, IK03, suitable for internal environment only.

Technical Assets

Dimensions (mm)

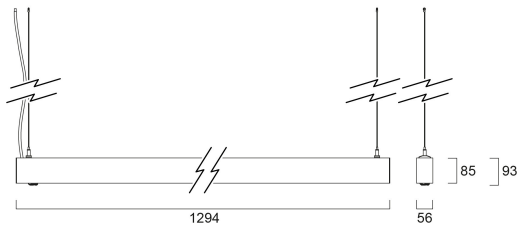

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.73	0.71	9095
			E07: 36.1" 2500
			E100: 35.3" 2500
1.0	1.46	1.42	2219
			E07: 36.1" 842
			E100: 35.3" 671
1.5	2.19	2.12	1074
			E07: 36.1" 268
			E100: 35.3" 206
2.0	2.92	2.83	604
			E07: 36.1" 161
			E100: 35.3" 126
2.5	3.65	3.54	387
			E07: 36.1" 103
			E100: 35.3" 77
3.0	4.38	4.25	260
			E07: 36.1" 71
			E100: 35.3" 53

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 72.6°)
 — C90 - C270 (Half beam angle: 72.2°)



CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W

Item No: 2064636

Concord

General data

Product name	CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Built in presence detector	PIR
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5350
Luminaire efficacy (lm/W)	145
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	37
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.97
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	500
Inrush Current (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	C, B (more than 1 Light Source)
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

CONTINUUM PLUS 1.2 940 ST UGR DI SSA03 W

Item No: 2064636

Concord

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	89000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	1294
Nominal Product Width (mm)	56
Nominal Product Height (mm)	93
Weight (kg)	3.2

Packaging

Product EAN number	5025768646364
Packaging single length / height (cm)	139.0
Packaging single width (cm)	11.7
Packaging single depth (cm)	14.7
DUN14 (inner)	05025768646364
Units per outer package	1
Packaging outer length / height (cm)	139.0
Packaging outer width (cm)	11.7
Packaging outer depth (cm)	14.7

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25