


Resisto 1500 IP66 4200lm 840 EM

Item No: 0010253

SYLVANIA


PROTM

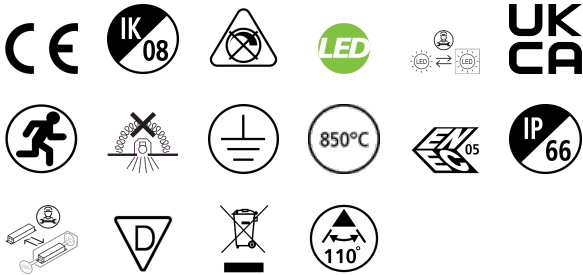

Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 4200lm; 34W; 124lm/W; 4000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark; 3-hour maintained emergency batteries.

Technical Assets


Dimensions (mm)

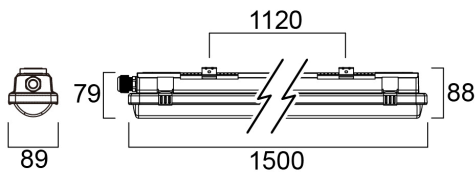

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.43 1.32	50° 52°	543 511	827 807
1.0	2.86 2.63	50° 52°	1081 108	138 138
1.5	4.28 3.95	50° 52°	600 607	60 60
2.0	5.71 5.27	50° 52°	338 338	15 15
2.5	7.14 6.59	50° 52°	218 218	6 6
3.0	8.57 7.90	50° 52°	150 14	4 11

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 105.0°)
 — C90 - C270 (Half beam angle: 110.0°)



Resisto 1500 IP66 4200lm 840 EM

Item No: 0010253

SYLVANIA

General data

Product name	Resisto 1500 IP66 4200lm 840 EM
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	5°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	124
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 23
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	655

Electrical data

Emergency duration (h)	3
Total power consumption (W)	34
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	5.5
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	41
Max. products per 13A C Breaker	53
Max. products per 16A C Breaker	65
Max. products per 20A C Breaker	82
Max. products per 10A B Breaker	41
Max. products per 13A B Breaker	53
Max. products per 16A B Breaker	65
Max. products per 20A B Breaker	82
Connectable conductor cross section - Max (mm ²)	2.5

Resisto 1500 IP66 4200lm 840 EM

Item No: 0010253

SYLVANIA

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80

Packaging

Product EAN number	5410288102535
Packaging single length / height (cm)	150.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102535
Units per outer package	1
Packaging outer length / height (cm)	150.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-40