

# START Panel UGR19 600x600 4800Lm 840 SSC

Item No: 0042567


**SYLVANIA**



START Panel is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. 4800Lm; 43W; 112Lm/W; Drive current: 950mA; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP40 (from the front); SDCM<3; Class II; Loop in loop out connector for quick installation. Not compatible with surface mounting frames. SylSmart Standalone (SSC) enabled.

## Technical Assets


### Dimensions (mm)

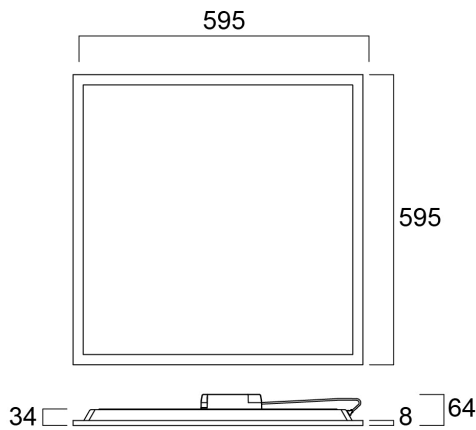

### Photometrics

Distance [m]	Cone diameter [m]	E10%	E50%	E90%	Illuminance [lx]
0.5	1.01	817	817	45.3°	9190
1.0	2.02	817	817	45.3°	2297
1.5	3.03	817	817	45.3°	1021
2.0	4.04	817	817	45.3°	574
2.5	5.05	817	817	45.3°	368
3.0	6.06	817	817	45.3°	250

Distance [m] Cone diameter [m] Illuminance [lx]  
 C0 - C180 (Half beam angle: 90.6°)



# START Panel UGR19 600x600 4800Lm 840 SSC

Item No: 0042567

**SYLVANIA**

## General data

Product name	START Panel UGR19 600x600 4800Lm 840 SSC
Technology	LED
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
Operating temperature range (°C)	-10°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4278374
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	4800
Luminaire efficacy (lm/W)	112
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

## Electrical data

Total power consumption (W)	43
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	5
Electrical protection	Class II
Control gear required	Yes
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Standalone (SSC)
Minimum dimming level (%)	1
Drive current (mA)	950
Inrush Current (A)	23
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	23
Max. products per 13A C Breaker	31
Max. products per 16A C Breaker	38
Max. products per 20A C Breaker	48
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	19
Max. products per 16A B Breaker	23
Max. products per 20A B Breaker	29

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	71000

# START Panel UGR19 600x600 4800Lm 840 SSC

Item No: 0042567



## Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	Other
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	34
Weight (kg)	1.8

## Packaging

Product EAN number	5410288425672
Packaging single length / height (cm)	60.0
Packaging single width (cm)	68.5
Packaging single depth (cm)	3.8
DUN14 (inner)	15410288425679
Units per inner package	2
Packaging inner length / height (cm)	65.0
Packaging inner width (cm)	72.0
Packaging inner depth (cm)	10.6
DUN14 (outer)	25410288425676
Units per outer package	40
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	72.0
Packaging outer depth (cm)	101.0

## Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-45