


# Myriad Deco Housing Spot 3000K PHDM WHITE REF

Item No: 2057985


Concord

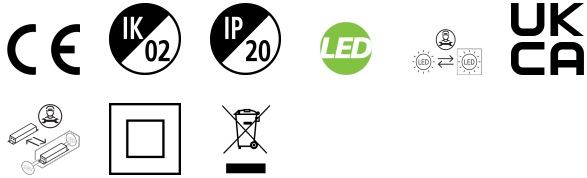

The Myriad Housing 3000K Spot accent downlight is a high efficient 10W recessed spotlight, luminous flux: 1119lm, luminaire efficacy 112lm/W. Colour rendering index Ra>80, Colour temperature 3000K, Beam angle 28°, Protection rating IP20, Cut out dimensions: 76mm.

## Technical Assets

### Dimensions (mm)

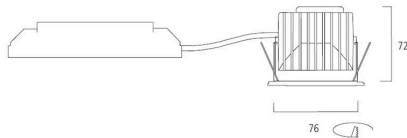


Dimensions (mm)

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.26	0.26	14.4°	12470
1.0	0.51	0.51	14.4°	3115
1.5	0.77	0.77	14.4°	1326
2.0	1.03	1.03	14.4°	779
2.5	1.28	1.28	14.4°	499
3.0	1.54	1.54	14.4°	346

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 28.8°)

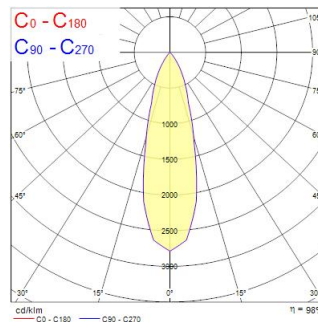

# Myriad Deco Housing Spot 3000K PHDM WHITE REF

Item No: 2057985

# Concord

## General data

Product name	Myriad Deco Housing Spot 3000K PHDM WHITE REF
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Museums & Galleries, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	1119
Luminaire efficacy (lm/W)	112
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	28
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	Other
Minimum dimming level (%)	10
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

## Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Height (mm)	72
Recessed Depth (mm)	72

## Packaging

Product EAN number	5025768579853
Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.5
Packaging single depth (cm)	15.0
DUN14 (inner)	05025768579853
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	15.0