

Beacon CRI93 3000K WB L3 TE White

Item No: 2059629


Concord



Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink, beam angle: 55° wide beam, optics: Aluminium reflector, colour temperature: 3000K warm white, total system power: 21W, total fixture output: 1700lm, luminaire efficacy: 81lm/W, LOR: 100%, colour rendering: Ra 93 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, trailing edge dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track Adaptor, compatible with OneTrack, Global Trac, and Concord Lytespan 3 track (for detailed information please check the compatibility list), protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x130x190mm, weight: 0.96kg.

Technical Assets


Dimensions (mm)

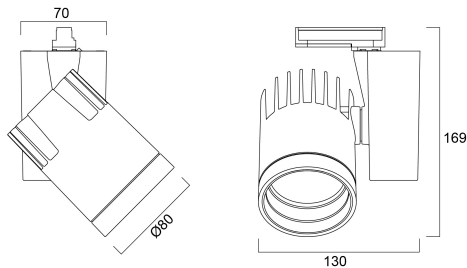

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.82	Ø171	27'8"	8812
		FCØ8	27'8"	3073
1.0	1.05	Ø171	27'8"	2202
		FCØ8	27'8"	788
1.5	1.57	Ø171	27'8"	979
		FCØ8	27'8"	344
2.0	2.09	Ø171	27'8"	581
		FCØ8	27'8"	192
2.5	2.61	Ø171	27'8"	352
		FCØ8	27'8"	123
3.0	3.14	Ø171	27'8"	246
		FCØ8	27'8"	61

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 55.2°)



Beacon CRI93 3000K WB L3 TE White

Item No: 2059629

Concord

General data

Product name	Beacon CRI93 3000K WB L3 TE White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	81
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	93
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	55
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	21
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Dimming method	Mains: trailing edge only
Minimum dimming level (%)	3
Drive current (mA)	500
Inrush Current (A)	45
Inrush Duration (µs)	20
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	48
Max. products per 16A C Breaker	80

Lifetime data

Lifespan L70 B50	72000
Lifespan L70 B10	72000
Lifespan L80 B50	72000
Lifespan L80 B20	72000
Lifespan L80 B10	72000
Lifespan L90 B50	43000
Lifespan L90 B20	36000
Lifespan L90 B10	33000

Beacon CRI93 3000K WB L3 TE White

Item No: 2059629

Concord

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	130
Nominal Product Height (mm)	190
Nominal Product Diameter (mm)	80
Weight (kg)	0.7

Packaging

Product EAN number	5025768596294
Packaging single length / height (cm)	18.0
Packaging single width (cm)	18.0
Packaging single depth (cm)	16.0
DUN14 (inner)	05025768596294
Units per outer package	1
Packaging outer length / height (cm)	18.0
Packaging outer width (cm)	18.0
Packaging outer depth (cm)	16.0

Safety data

Glow Wire Test (°C)	650
---------------------	-----