


Beacon XL CRI85 4000K MB L3 White

Item No: 2059721


Concord

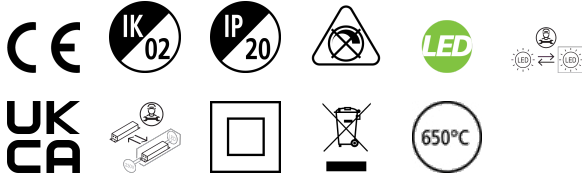

Integrated LED spotlight, white RAL 9016, compact and minimalist design, ideal for retail and display applications, die-cast aluminium body, passive cooling heatsink, beam angle: 34° medium beam, optics: Polycarbonate lens, colour temperature: 4000K neutral white, total system power: 33W, total fixture output: 3800lm, luminaire efficacy: 115lm/W, LOR: 100%, colour rendering: Ra 85 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 800mA, electronic driver, non-dimmable, power factor: 0.9 electrical protection: CLASS II, 3-circuit track Adaptor, compatible with OneTrack, Global Trac, and Concord Lytespan 3 track (for detailed information please check the compatibility list), protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x165x205mm, weight: 1.66kg.

Technical Assets


Dimensions (mm)

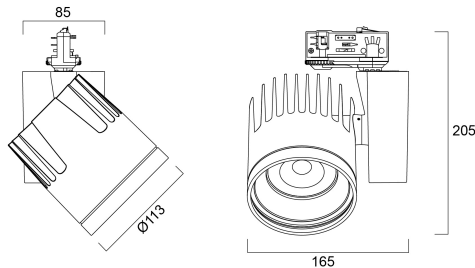

Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.31	Ø171	17.1"	3280
1.0	0.62	Ø342	34.2"	820
1.5	0.92	Ø513	51.3"	347
2.0	1.23	Ø684	68.4"	255
2.5	1.54	Ø855	85.5"	199
3.0	1.85	Ø1026	102.6"	152

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 34.2°)



Beacon XL CRI85 4000K MB L3 White

Item No: 2059721

Concord

General data

Product name	Beacon XL CRI85 4000K MB L3 White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
Environment	Internal
General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4280881
E-number SE	7401262
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	115
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	85
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	34
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	33
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Dimming method	N/A
Drive current (mA)	800
Inrush Current (A)	30
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	12
Max. products per 16A C Breaker	20
Max. products per 10A B Breaker	12
Max. products per 16A B Breaker	20

Lifetime data

Lifespan L70 B50	72000
Lifespan L80 B20	72000
Lifespan L90 B10	33000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	85
Nominal Product Width (mm)	165
Nominal Product Height (mm)	205
Weight (kg)	1.365

Beacon XL CRI85 4000K MB L3 White

Item No: 2059721

Concord

Packaging

Product EAN number	5025768597215
Packaging single length / height (cm)	25.0
Packaging single width (cm)	19.5
Packaging single depth (cm)	20.0
DUN14 (inner)	05025768597215
Units per outer package	1
Packaging outer length / height (cm)	25.0
Packaging outer width (cm)	19.5
Packaging outer depth (cm)	20.0

Safety data

Glow Wire Test (°C)	650
---------------------	-----