


Concord Beacon 3000k SM Narrow Dali White

Item No: 2062542

Concord

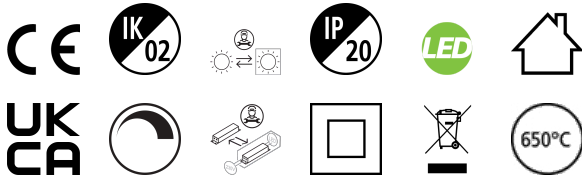

Simple and slick integral design with no driver box and without any visible screws New technology utilization for improved performance Extremely precise light beams due to the high-quality lenses ø80mm die-cast aluminium body, Fix beam angle: 19° , Textured white finishing colour Light color temperature: 3000K, warm light System power: 18W, Fixture lumen output: 1850lm, efficacy: 103lm/W, Ra97 typical, LED chromacity: 2 step MacAdam ellipse LED source (SDCM2), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, electronic driver, DALI dimmable Surface mounting with surface mounting base. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 355°, vertical tilt: 90° Nominal product dimensions: D.80mmx200mm 5 years warranty. Suitable for ceiling surface mounting, and wall surface mounting

Technical Assets


Dimensions (mm)



Photometrics

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.17 0.17	4548 2071 2071
1.0	0.34 0.33	1082 5243 5243
1.5	0.51 0.50	4527 2130 2130
2.0	0.68 0.67	2715 1311 1311
2.5	0.85 0.84	1738 838 840
3.0	1.01 1.00	1207 583 584

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 19.0°)
 — C90 - C270 (Half beam angle: 19.2°)



Concord Beacon 3000k SM Narrow Dali White

Item No: 2062542

Concord

General data

Product name	Concord Beacon 3000k SM Narrow Dali White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Wall surface mounted
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Museums & Galleries, Retail, Hospitality
Operating temperature range (°C)	-10°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	103
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	97
Colour Variation Initial (SDCM)	SDCM2
Luminous Intensity (cd)	1850
Beam Angle (°)	19
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	18
Supply current (A)	0.084
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
Drive current (mA)	500
Inrush Current (A)	16
Inrush Duration (µs)	100
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	50
Max. products per 16A C Breaker	70
Max. products per 16A B Breaker	55

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	100000
Lifespan L90 B50	56000

Concord Beacon 3000k SM Narrow Dali White

Item No: 2062542

Concord

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Other
Diffuser material	PMMA Acrylic
Reflector finish	Not Applicable
Nominal Product Length (mm)	200
Nominal Product Width (mm)	80
Nominal Product Height (mm)	250
Weight (kg)	1.2

Packaging

Product EAN number	5025768625420
Packaging single length / height (cm)	30.5
Packaging single width (cm)	13.5
Packaging single depth (cm)	20.5
DUN14 (inner)	05025768625420
Units per outer package	1
Packaging outer length / height (cm)	30.5
Packaging outer width (cm)	13.5
Packaging outer depth (cm)	20.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-10-35
Dry applications use only	Yes