

CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W

Item No: 2064645


Concord



CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W is a linear luminaire for suspended, surface or ceiling recessed mounting with 3 meter pre-wiring and complete with end caps and suspension cables, direct light distribution, compact and minimalist design, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, white (RAL9016) finishing, extruded aluminium body, 1294x56x93mm dimensions, opal diffuser, 4000K (neutral white) colour temperature, total system power: 25W, total fixture output: 2900lm, luminaire efficacy: 116lm/W, colour rendering: Ra >90, LED Chromacity: 3 step MacAdam ellipse, lifespan: 89,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, drive current: 500mA, electronic driver, SylSmart® Connected enabled, 3-hours LiFePO4 integrated DALI Self Test emergency, Class I electrical protection, IP20, IK03, suitable for internal environment only.

Technical Assets

Dimensions (mm)

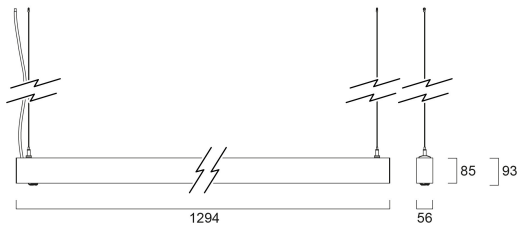

Photometrics

| Distance [m] | Cone diameter [m] | Beam diameter [m] | Beam diameter [ft] | Illuminance [lx] |
|--------------|-------------------|-------------------|--------------------|------------------|
| 0.5 | 1.23 1.31 | 0.70 | 0.70 | 4432 3911 |
| 1.0 | 2.45 2.62 | 1.40 | 1.40 | 1108 978 |
| 1.5 | 3.68 3.92 | 2.10 | 2.10 | 492 435 |
| 2.0 | 4.90 5.23 | 2.80 | 2.80 | 277 245 |
| 2.5 | 6.13 6.54 | 3.50 | 3.50 | 177 156 |
| 3.0 | 7.36 7.85 | 4.20 | 4.20 | 133 116 |

Distance [m] Cone diameter [m] Beam diameter [m] Beam diameter [ft] Illuminance [lx]

— C0 - C180 (Half beam angle: 105.2°)
— C90 - C270 (Half beam angle: 101.6°)



CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W

Item No: 2064645

Concord

General data

| | |
|----------------------------------|--|
| Product name | CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended, Ceiling surface mounting, Ceiling recessed mounting |
| Built in presence detector | PIR |
| Fixture rating | Enclosed |
| General application | Office, Education, Retail |
| Operating temperature range (°C) | 1°C...+25°C |
| Virtual assistant compatibility | N/A |
| ETIM Class | EC002892 |
| Warranty | 5 years |

Optical data

| | |
|-----------------------------------|---------------|
| Fixture luminous flux (lm) | 2900 |
| Luminaire efficacy (lm/W) | 116 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Distribution type | Symmetric |
| Glare control | < 25 |
| Photobiological Risk Group | RG1 |
| Luminous flux (emergency) (lm) | 255 |

Electrical data

| | |
|--|-----------------------------|
| Emergency mode | Maintained |
| Emergency type | |
| Emergency duration (h) | 3 |
| Total power consumption (W) | 25 |
| Supply current (A) | 0.123 |
| Primary Supply/Product voltage - min (V) | 220.0 |
| Primary Supply/Product voltage - max (V) | 240.0 |
| Lamp power factor | 0.97 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x % | 10 |
| Electrical protection | Class I |
| Control gear required | No |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Dimming method | SylSmart Connected (SSA) |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 500 |
| Inrush Current (A) | 13.6 |
| Inrush Duration (µs) | 304 |
| Energy Efficiency Class (A->G) of contained light source | B |
| Nominal Frequency (Hz) | 50/60Hz |
| LED Flickering Rate | Ultra low (5% or less) |
| Max. products per 10A C Breaker | 30 |
| Max. products per 13A C Breaker | 38 |
| Max. products per 16A C Breaker | 46 |
| Max. products per 20A C Breaker | 58 |
| Max. products per 10A B Breaker | 18 |
| Max. products per 13A B Breaker | 23 |
| Max. products per 16A B Breaker | 28 |
| Max. products per 20A B Breaker | 35 |
| Connectable conductor cross section - Min (mm ²) | 0.75 |

CONTINUUM PLUS 1.2 940 ST OPAL D SSA03 EM W

Item No: 2064645

Concord

| | | | |
|--|----------------------------------|---------------------------------------|----------------|
| Connectable conductor cross section - Max (mm ²) | 1.5 | Packaging | |
| Lifetime data | | Product EAN number | 5025768646456 |
| Lifespan L70 B50 | 100000 | Packaging single length / height (cm) | 139.0 |
| Lifespan L80 B50 | 89000 | Packaging single width (cm) | 11.7 |
| Physical data | | Packaging single depth (cm) | 14.7 |
| Housing colour | RAL 9016 - Traffic white / Bezel | DUN14 (inner) | 05025768646456 |
| IP rating | IP20 | Units per outer package | 1 |
| IK rating | IK03 | Packaging outer length / height (cm) | 139.0 |
| Diffuser finish | Opal | Packaging outer width (cm) | 11.7 |
| Diffuser material | PC Polycarbonate | Packaging outer depth (cm) | 14.7 |
| Reflector finish | Not Applicable | Safety data | |
| Nominal Product Length (mm) | 1294 | Glow Wire Test (°C) | 650 |
| Nominal Product Width (mm) | 56 | Optimal operating condition (°C) | 1-25 |
| Nominal Product Height (mm) | 93 | | |
| Weight (kg) | 3.6 | | |