

INSET TREND KIT SW REFLED ES50 36° BN NW DIM

Item No: 3001763


PROTM



GU10 Housing with REFLED ES50 36° lamp included, Ideal for indoor application, Loop in - loop out box included

Technical Assets

Dimensions (mm)

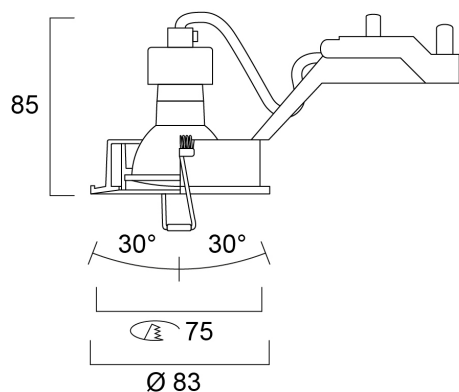

Photometrics

INSET TREND KIT SW REFLED ES50 36° BN NW DIM

Item No: 3001763

General data

Product name	INSET TREND KIT SW REFLED ES50 36° BN NW DIM
Technology	LED
Cap/Base	GU10
Housing	Aluminium
Mount	Ceiling recessed mounting
Built in presence detector	NONE
Environment	Indoor
General application	Hospitality, Residential & Consumer
Virtual assistant compatibility	N/A
ETIM Class	EC001744
E-number FI	4270036
E-number SE	7468151
Warranty	3 years

Optical data

Fixture luminous flux (lm)	345
Luminaire efficacy (lm/W)	76
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Adjustable chromaticity	N
Beam Angle (°)	36
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Light source included	0029128
Total power consumption (W)	4.5
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	Mains: leading / trailing edge
Energy Efficiency Class (A->G) of contained light source	F
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.0

Physical data

Housing colour	White
IP rating	IP23/20
IK rating	IK02
Diffuser finish	Other
Diffuser material	None
Reflector finish	Not Applicable
Nominal Product Height (mm)	85
Nominal Product Diameter (mm)	83
Weight (kg)	0.179
Recessed Depth (mm)	100

Packaging

Product EAN number	8711971017639
Packaging single length / height (cm)	13.0
Packaging single width (cm)	9.9
Packaging single depth (cm)	8.5
DUN14 (inner)	18711971017636
Units per outer package	30
Packaging outer length / height (cm)	28.8
Packaging outer width (cm)	28.5
Packaging outer depth (cm)	52.5

INSET TREND KIT SW REFLED ES50 36° BN NW DIM

Item No: 3001763

Safety data

Glow Wire Test (°C)	650
---------------------	-----