


# RANA LED S 1200 LO 4K LOUVV+PRI W GEN2

Item No: 0051480

**SYLVANIA**


**PRO**<sup>TM</sup>

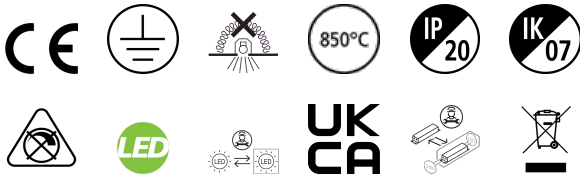

Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 1160x187x47mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 1130x65mm, Constant Current, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 3100lm, 28W, 111lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m<sup>2</sup>, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.

## Technical Assets

### Dimensions (mm)

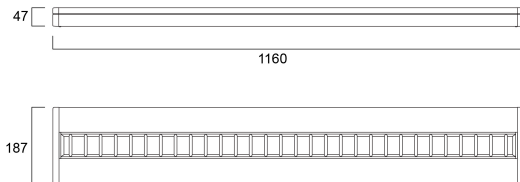


### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [ft]	Illuminance [lx]
0.5	0.94 0.95	0.71 0.72	2.33 2.34	1380 1370
1.0	1.88 1.72	1.42 1.44	4.66 4.41	345 355
1.5	2.82 2.58	2.13 2.16	7.00 7.11	155 151
2.0	3.77 3.44	2.84 2.88	9.33 9.48	117 113
2.5	4.71 4.30	3.55 3.60	11.66 11.88	91 88
3.0	5.65 5.16	4.26 4.32	14.00 14.28	75 72

Distance [m]    Cone diameter [m]    Beam diameter [m]    Beam diameter [ft]    Illuminance [lx]

— C0 - C180 (Half beam angle: 81.4°)    — C90 - C270 (Half beam angle: 86.6°)



# RANA LED S 1200 LO 4K LOUV+PRI W GEN2

Item No: 0051480

**SYLVANIA**

## General data

Product name	RANA LED S 1200 LO 4K LOUV+PRI W GEN2
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Built in presence detector	NONE
General application	Office, Hospitality, Retail, Education
Operating temperature range (°C)	5°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
E-number FI	4273596
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	3100
Luminaire efficacy (lm/W)	111
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG0

## Electrical data

Total power consumption (W)	28
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	275
Inrush Current (A)	22
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	28
Max. products per 13A C Breaker	36
Max. products per 16A C Breaker	45
Max. products per 20A C Breaker	56
Max. products per 10A B Breaker	17
Max. products per 13A B Breaker	22
Max. products per 16A B Breaker	27
Max. products per 20A B Breaker	34
Connectable conductor cross section - Min (mm <sup>2</sup> )	2.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# RANA LED S 1200 LO 4K LOUV+PRI W GEN2

Item No: 0051480



## Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

## Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Diffuser finish	Prismatic
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1160
Nominal Product Width (mm)	187
Nominal Product Height (mm)	47
Weight (kg)	3.5

## Packaging

Product EAN number	5410288514802
Packaging single length / height (cm)	153.5
Packaging single width (cm)	6.5
Packaging single depth (cm)	21.0
DUN14 (inner)	05410288514802
Units per outer package	1
Packaging outer length / height (cm)	153.5
Packaging outer width (cm)	6.5
Packaging outer depth (cm)	21.0

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	5-25