


# Myriad Square HOUS Flood 4K DALI BLACK REFL

Item No: 2056342


Concord

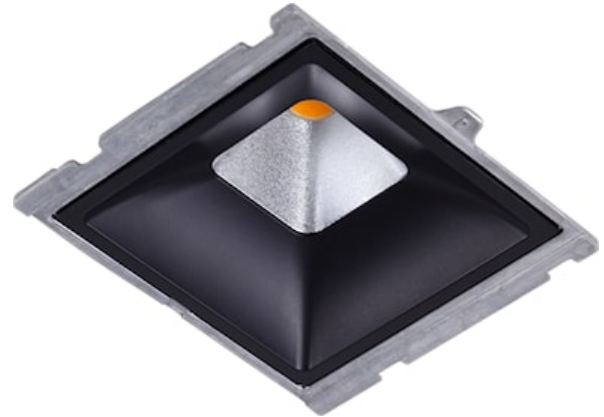

MYRIAD SQUARE HOUSING FLOOD 4000K DALI BLACK REFLECTOR COLOR

## Technical Assets


### Dimensions (mm)

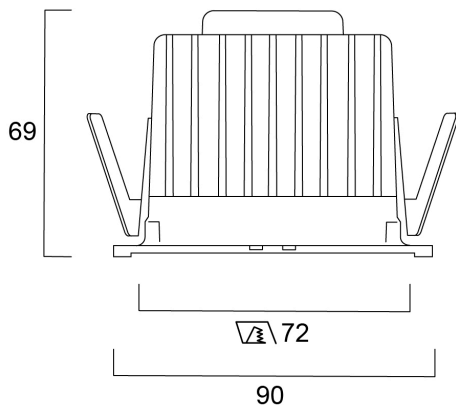

### Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.36	0.36	20°	818 330
1.0	0.72	0.72	20°	204 82
1.5	1.08	1.08	20°	90 37
2.0	1.44	1.44	20°	51 21
2.5	1.80	1.80	20°	32 13
3.0	2.16	2.16	20°	22 9

Distance [m]    Cone diameter [m]    Illuminance [lx]  
C0 - C180 (Half beam angle: 40.0°)

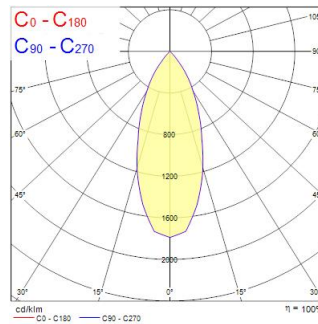

# Myriad Square HOUS Flood 4K DALI BLACK REFL

Item No: 2056342

## Concord

### General data

Product name	Myriad Square HOUS Flood 4K DALI BLACK REFL
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality, Office, Residential & Consumer, Retail
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1142
Luminaire efficacy (lm/W)	114
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	48
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	10
Primary Supply/Product voltage - min (V)	230
Primary Supply/Product voltage - max (V)	240
Electrical protection	Class II
Dimmable	Yes
Dimming method	DALI-2, Switch-dim (mains-rated)
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B10	68500

### Physical data

Housing colour	Aluminium
IP rating	IP20
IK rating	IK02
Reflector finish	Not Applicable
Nominal Product Width (mm)	72
Nominal Product Height (mm)	64
Recessed Depth (mm)	64

### Packaging

Product EAN number	5025768563425
Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.5
Packaging single depth (cm)	15.0
DUN14 (inner)	05025768563425
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	15.0