


OptiClip 1200 HO 2L 34W 4500lm 840 DALI

Item No: 0043003

SYLVANIA


PROTM

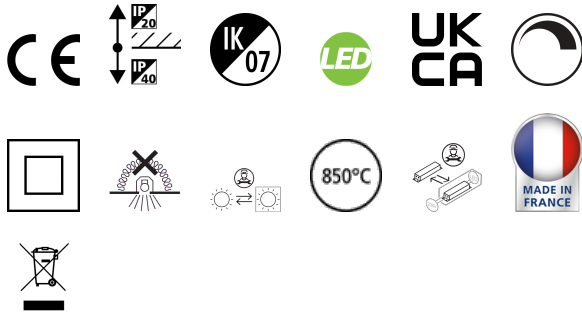

OPTICLIP 1200 2L 4000K C8 HO WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm luminous flux, 34W power consumption, 132lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<18, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Technical Assets

Dimensions (mm)

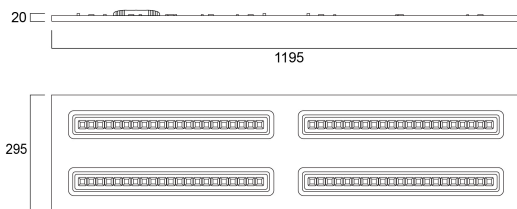

Photometrics

Distance [m]	Cone diameter [m]	E171	E180	E190	E200	E210	E220	E230	E240	E250	E260	E270	E280	E290	E300	Iluminance [lx]
0.5	0.84 0.81	1096	2421	2421	2421	2421	2421	2421	2421	2421	2421	2421	2421	2421	2421	2421
1.0	1.67 1.62	2674	585	585	585	585	585	585	585	585	585	585	585	585	585	585
1.5	2.51 2.43	1155	239	239	239	239	239	239	239	239	239	239	239	239	239	239
2.0	3.34 3.24	565	181	181	181	181	181	181	181	181	181	181	181	181	181	181
2.5	4.16 4.05	423	131	131	131	131	131	131	131	131	131	131	131	131	131	131
3.0	5.02 4.86	291	91	91	91	91	91	91	91	91	91	91	91	91	91	91

Distance [m] Cone diameter [m] Iluminance [lx]
 — C0 - C180 (Half beam angle: 78.9°)
 — C90 - C270 (Half beam angle: 78.9°)

