


Pixo Pendant 3150lm 3CCT MB WB Multipower Black

Code article 0004702

SYLVANIA


PROTM

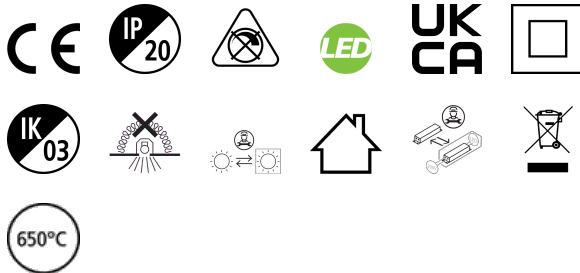

Simple and slick integral design. Extremely precise light beams due to the high-quality lenses. Easily replaceable lens system, die-cast aluminium body, beam angle: 36°, and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 2700-3000-4000K, 3-CCT switch on the housing of the product, System power: 27W, Fixture lumen output: 3150lm, efficacy: 117lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation. Operating voltage 220-240V / 50-60Hz, electronic driver with multipower settings, ultra low LED flickering rate (5% or less). Multipower version with 8 settings to meet all installation needs in one single product (selection between 950lm; 1200lm; 1450lm; 1650lm; 1850lm; 2300lm; 2700lm; 3150lm). Ceiling surface mounting. Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only. Push-in terminals for quick installation. Lifespan up to 100,000h, L90B10. Complete with 1.2m suspension cable, and a ceiling rose. Nominal product dimensions: D.81mmx1410mm. 5 years warranty. Recycling instructions for extra lens in this product: please contact us for recycling instructions or disposal.

Atouts techniques

Dimensions (mm)

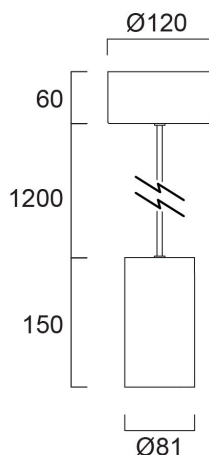

Photométrie


Distance [m]	Cone diameter [m]	Beam diameter [m]	Illuminance [lx]
0.5	0.33 0.27	Ø17 Ø16	11047 483 4987
1.0	0.66 0.54	Ø34 Ø32	2762 120 1247
1.5	0.99 0.82	Ø51 Ø48	1227 54 554
2.0	1.31 1.09	Ø68 Ø64	696 25 272
2.5	1.63 1.36	Ø85 Ø80	442 16 159
3.0	1.96 1.63	Ø102 Ø96	307 11 139

Distance [m] Cone diameter [m] Illuminance [lx]
 — C2 - C180 (Half beam angle: 30.4°)
 — C50 - C270 (Half beam angle: 36.2°)

Pixo Pendant 3150lm 3CCT MB WB Multipower Black

Code article 0004702

SYLVANIA



Données générales

Nom du produit	Pixo Pendant 3150lm 3CCT MB WB Multipower Black
Technologie	LED
Cap/Base	N/A
Housing	Aluminium
Montage	Ceiling surface mounting
Built in presence detector	NONE
General application	Museums & Galleries, Retail
Operating temperature range (°C)	1°C...+35°C
Virtual assistant compatibility	N/A
ETIM Class	EC001743
Numéro virtuel FI	4279902
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	3150
Luminaire efficacy (lm/W)	117
Couleur de lumière	N/A
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	27
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class II
Type d'appareillage	LED driver constant current
Dimmable	No
Dimming method	N/A
Courant d'appel (A)	5.38
Inrush Duration (µs)	32
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	29
Max. products per 16A C Breaker	47
Max. products per 16A B Breaker	47
Connectable conductor cross section - Max (mm ²)	2.5

Pixo Pendant 3150lm 3CCT MB WB Multipower Black

Code article 0004702

SYLVANIA

Durée de vie

Lifespan L70 B50	120000
Lifespan L70 B20	120000
Lifespan L70 B10	120000
Lifespan L80 B50	120000
Lifespan L80 B20	120000
Lifespan L80 B10	120000
Lifespan L90 B50	120000
Lifespan L90 B20	109000
Lifespan L90 B10	100000

Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Diffuser finish	Other
Diffuser material	None
Nominal Product Height (mm)	1410
Nominal Product Diameter (mm)	81
Poids (kg)	1.02

Emballage

Product EAN number	5410288047027
Longueur simple de l'emballage (cm)	33.0
Largeur simple de l'emballage (cm)	17.0
Packaging single depth (cm)	16.0
DUN14 (inner)	15410288047024
Units per outer package	6
Packaging outer length / height (cm)	52.5
Packaging outer width (cm)	34.5
Packaging outer depth (cm)	34.0

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	1-35