

# Pixo Small 1600lm 940 NB MB WB BLK

Code article 0005447


**SYLVANIA**



Integrated LED spotlight, Textured Black - RAL9005, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lenses 24° and 54° beam angle included, color temperature: 4000k , total system power: 15W, total fixture output: 1615 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Powergear 3-circuit adapter suitable for 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø60x70x245, weight: 0.517kg. Compatible with OneTrack.

## Atouts techniques


### Dimensions (mm)

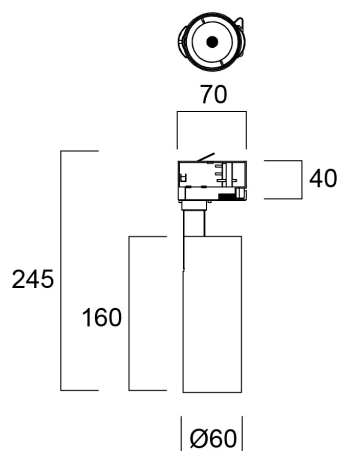

### Photométrie

Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.36 0.36	36°	1555
1.0	0.71 0.72	36°	389
1.5	1.07 1.07	36°	170
2.0	1.42 1.43	36°	92
2.5	1.78 1.79	36°	58
3.0	2.14 2.15	36°	40

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 28.4°)  
 — C90 - C270 (Half beam angle: 39.2°)



# Pixo Small 1600lm 940 NB MB WB BLK

Code article 0005447

**SYLVANIA**

## Données générales

Nom du produit	Pixo Small 1600lm 940 NB MB WB BLK
Technologie	LED
Cap/Base	N/A
Montage	Track mounting
Environment	Indoor
General application	Museums & Galleries, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Numéro virtuel FI	4278247
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	1615
Luminaire efficacy (lm/W)	108
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	36
Photobiological Risk Group	RG1

## Caractéristiques électriques

Consommation électrique totale (W)	15
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Courant d'appel (A)	12
Inrush Duration (µs)	33
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	68
Max. products per 13A C Breaker	88
Max. products per 16A C Breaker	108
Max. products per 20A C Breaker	135
Max. products per 10A B Breaker	68
Max. products per 13A B Breaker	88
Max. products per 16A B Breaker	108
Max. products per 20A B Breaker	135

## Durée de vie

Lifespan L70 B50	100000
Lifespan L80 B20	100000
Lifespan L90 B50	56000
Lifespan L90 B10	41000

# Pixo Small 1600lm 940 NB MB WB BLK

Code article 0005447

**SYLVANIA**

## Données physiques

Housing colour	Black
IP rating	IP20
IK rating	IK03
Longueur (mm)	70
Largeur (mm)	60
Nominal Product Height (mm)	245
Poids (kg)	0.517

## Emballage

Product EAN number	5410288054476
Longueur simple de l'emballage (cm)	8.5
Largeur simple de l'emballage (cm)	8.5
Packaging single depth (cm)	26.0
DUN14 (inner)	15410288054473
Units per outer package	12
Packaging outer length / height (cm)	35.5
Packaging outer width (cm)	27.0
Packaging outer depth (cm)	28.0

## Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-20-40