
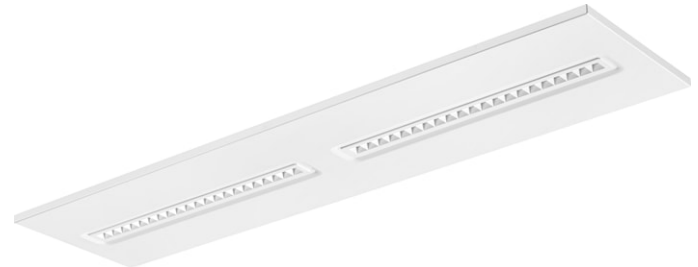


OptiClip 1200 3000K C8 WH DALI WHITE

Code article 0044013

SYLVANIA


PROTM

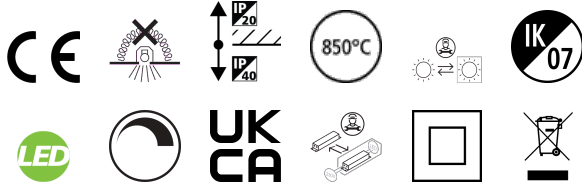

OPTICLIP 1200 3000K C8 WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 1195x295x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 2000 cd/m², lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

Atouts techniques

Dimensions (mm)

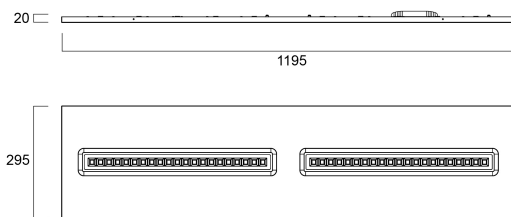

Photométrie

0.5	0.85 0.92	E171 E180 E180	402° 402° 38.9°	720 1521 1575
1.0	1.68 1.65	E171 E180 E180	402° 402° 38.9°	1315 455 410
1.5	2.54 2.47	E171 E180 E180	402° 402° 38.9°	807 155 136
2.0	3.38 3.30	E171 E180 E180	402° 402° 38.9°	454 133 105
2.5	4.23 4.12	E171 E180 E180	402° 402° 38.9°	290 85 67
3.0	5.07 4.95	E171 E180 E180	402° 402° 38.9°	202 47 41

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 78.9°)
— C90 - C270 (Half beam angle: 80.4°)

