

SYLBATTEN IP20 L1800 SINGLE 4000K

Code article 0045161

SYLVANIA


YourHome™



full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 24W, 3250 lum, 4000K, 25000h lifetime


Atouts techniques

Dimensions (mm)

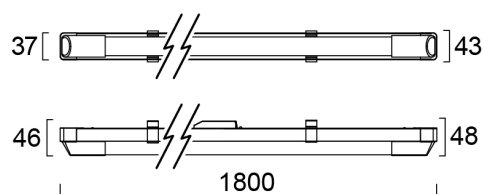

Photométrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	33.69 1.35	5071 5071 5071
1.0	67.39 2.70	1268 1268 1268
1.5	101.09 4.05	543 543 543
2.0	134.77 5.41	272 272 272
2.5	168.47 6.76	173 173 173
3.0	202.16 8.11	115 115 115



SYLBATTEN IP20 L1800 SINGLE 4000K

Code article 0045161

SYLVANIA

Données générales

Nom du produit	SYLBATTEN IP20 L1800 SINGLE 4000K
Technologie	LED
Cap/Base	N/A
General application	Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	2 ans

Données optiques

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	135
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	24
Primary Supply/Product voltage - min (V)	230.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	55
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	27
Max. products per 16A C Breaker	33
Max. products per 20A C Breaker	42
Max. products per 10A B Breaker	14
Max. products per 13A B Breaker	18
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	28

Durée de vie

Lifespan L70 B50	25000
------------------	-------

Données physiques

IP rating	IP20
IK rating	IK02
Longueur (mm)	1800
Largeur (mm)	43
Nominal Product Height (mm)	48
Poids (kg)	0.54

SYLBATTEN IP20 L1800 SINGLE 4000K

Code article 0045161

SYLVANIA

Emballage

Product EAN number	5410288451619
Longueur simple de l'emballage (cm)	180.0
Largeur simple de l'emballage (cm)	4.25
Packaging single depth (cm)	4.72
DUN14 (inner)	15410288451616
Units per outer package	20
Packaging outer length / height (cm)	182.0
Packaging outer width (cm)	22.5
Packaging outer depth (cm)	25.5