


START FLAT PANEL LED 600 4000K G2

Code article 0047751


SYLVANIA

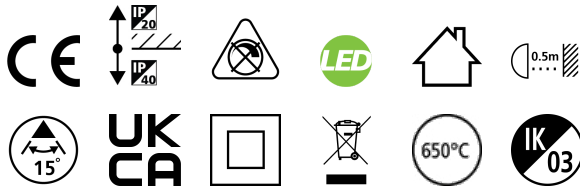

Edge lit LED flat panel. Low Flicker, 39 W, Neutral White, 4000 K, 4000 lumens, 104 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 595 x 595 mm

Atouts techniques


Dimensions (mm)

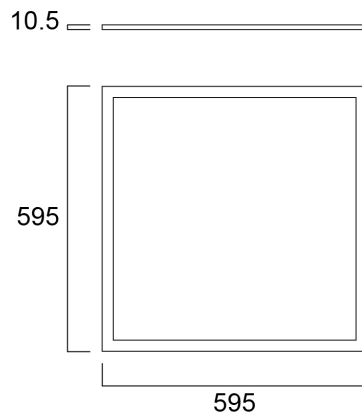

Photométrie

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.83 1.44	870 454 521
1.0	3.07 2.89	149 116 131
1.5	4.60 4.33	63 42 48
2.0	6.14 5.76	36 28 31
2.5	7.67 7.22	22 19 21
3.0	9.20 8.67	16 13 15

Distance [m] Cone diameter [m] Illuminance [lx]
— C0 - C180 (Half beam angle: 113.6°)
— C90 - C270 (Half beam angle: 113.6°)

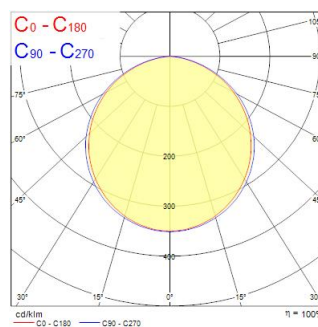

START FLAT PANEL LED 600 4000K G2

Code article 0047751

SYLVANIA

Données générales

Nom du produit	START FLAT PANEL LED 600 4000K G2
Technologie	LED
Housing	Aluminium
Montage	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Numéro virtuel FI	4274109
Warranty	5 ans

Données optiques

Fixture luminous flux (lm)	4000
Luminaire efficacy (lm/W)	104
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Chromaticité réglable	N
Beam Angle (°)	15
Glare control	< 22
Photobiological Risk Group	RG0

Caractéristiques électriques

Consommation électrique totale (W)	39
Lamp power factor	0.9
Electrical protection	Class II
Type d'appareillage	Electronic ballast
Dimmable	No
Drive current (mA)	1200
Courant d'appel (A)	14
Inrush Duration (µs)	450
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	20
Max. products per 10A B Breaker	12
Max. products per 16A B Breaker	19

Durée de vie

Lifespan L70 B50	50000
------------------	-------

Données physiques

Housing colour	White
IP rating	IP40/20
IK rating	IK03
Diffuser material	PMMA Acrylic
Longueur (mm)	595
Largeur (mm)	595
Nominal Product Height (mm)	10.5
Poids (kg)	2.914

START FLAT PANEL LED 600 4000K G2

Code article 0047751

SYLVANIA

Emballage

Product EAN number	5410288477510
Longueur simple de l'emballage (cm)	68.5
Largeur simple de l'emballage (cm)	63.0
Packaging single depth (cm)	4.0
DUN14 (inner)	15410288477517
Units per outer package	2
Packaging outer length / height (cm)	70.6
Packaging outer width (cm)	66.1
Packaging outer depth (cm)	10.1

Sécurité

Glow Wire Test (°C)	650
Condition de fonctionnement optimal (° C)	-10-40