

# OPTIX RECESSED 1250 2L 4000K ALU SSA03

Code article 2023926


Concord



OPTIX RECESSED 1250x310 2L 4000K ALU SSA03 is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 1250x310 mm. Alumined plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3600lm. Power consumption 25.5W. Luminaire efficacy 141lm/W. Lifespan: 48,500 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 0. Electrical protection Class I. Glow wire test 850°C.

## Atouts techniques

### Dimensions (mm)

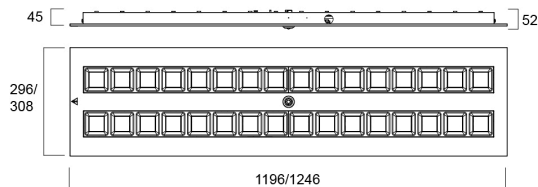


### Photométrie

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam diameter [in]	Illuminance [lx]
0.5	0.76 0.76	0.76	30.3"	8247
1.0	1.53 1.52	1.52	60.6"	2062
1.5	2.29 2.29	2.29	90.9"	891
2.0	3.06 3.06	3.06	121.2"	518
2.5	3.82 3.81	3.81	151.5"	344
3.0	4.59 4.57	4.57	181.8"	257

Distance [m]    Cone diameter [m]    Beam diameter [m]    Beam diameter [in]    Illuminance [lx]

— C0 - C180 (Half beam angle: 74.9°)    — C90 - C270 (Half beam angle: 74.9°)



# OPTIX RECESSED 1250 2L 4000K ALU SSA03

Code article 2023926

Concord

## Données générales

Nom du produit	OPTIX RECESSED 1250 2L 4000K ALU SSA03
Technologie	LED
Cap/Base	N/A
Housing	Steel
Montage	Ceiling recessed mounting
Built in presence detector	PIR
Fixture rating	Enclosed
General application	Office, Education
Operating temperature range (°C)	10°C...+25°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 ans

## Données optiques

Fixture luminous flux (lm)	3600
Luminaire efficacy (lm/W)	141
Température de couleur (K)	4000
Couleur de lumière	Neutral White
IRC (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 16
Photobiological Risk Group	RG0

## Caractéristiques électriques

Emergency type	
Consommation électrique totale (W)	25.5
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	10
Electrical protection	Class I
Control gear required	No
Type d'appareillage	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	250
Courant d'appel (A)	18
Inrush Duration (µs)	175
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.75
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# OPTIX RECESSED 1250 2L 4000K ALU SSA03

Code article 2023926

## Concord

### Durée de vie

Lifespan L70 B50	120000
Lifespan L80 B20	107500
Lifespan L90 B10	48500

### Données physiques

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Matt/satinized
Diffuser material	PC Polycarbonate
Finition réflecteur	High-gloss
Longueur (mm)	1246
Largeur (mm)	308.5
Nominal Product Height (mm)	38
Poids (kg)	5.6

### Emballage

Product EAN number	5025768239269
Longueur simple de l'emballage (cm)	139.0
Largeur simple de l'emballage (cm)	37.0
Packaging single depth (cm)	9.5
DUN14 (inner)	05025768239269
Units per outer package	1
Packaging outer length / height (cm)	139.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	9.5

### Sécurité

Glow Wire Test (°C)	850
Condition de fonctionnement optimal (° C)	10-25