
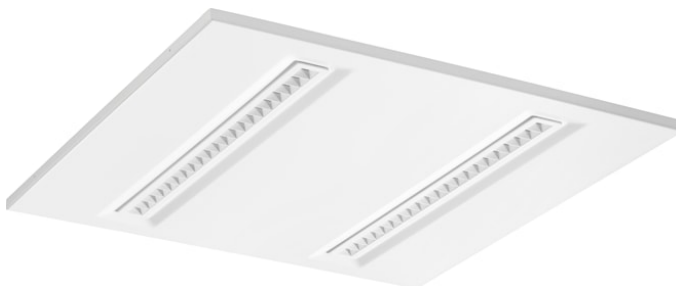


# OptiClip 600 3000K C8 WH DALI WHITE

Cikkszám 0044009

**SYLVANIA**


**PRO**<sup>TM</sup>

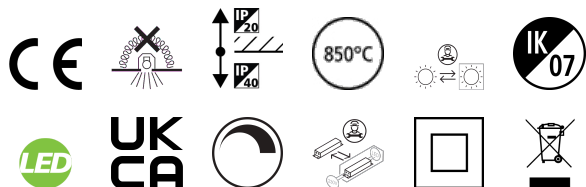

OPTICLIP 600 3000K C8 WH DALI WHITE is a high efficacy low glare luminaire with replaceable light engines for office and education applications. Ceiling recessed LED luminaire with white colour plastic optic, direct light distribution, luminaire dimensions: 595x595x20mm, Sylvania White body colour (RAL9016), IP40 (from the front), IK07, DALI Dimmable, low LED flicker (+/-5%), Warm White (3000K) LED Colour Temperature, 3100lm luminous flux, 26W power consumption, 119lm/W system efficacy, CRI>80, SDCM 3 (3-step MacAdam ellipse) LED Colour Consistency, UGR<17, Luminance at 65° < 2000 cd/m<sup>2</sup>, lifespan: 62,000 hours L80B20, photobiological safety risk group 1. Electrical protection Class II. Glow wire test 850°C.

## Műszaki eszközök

### Méretek (mm)

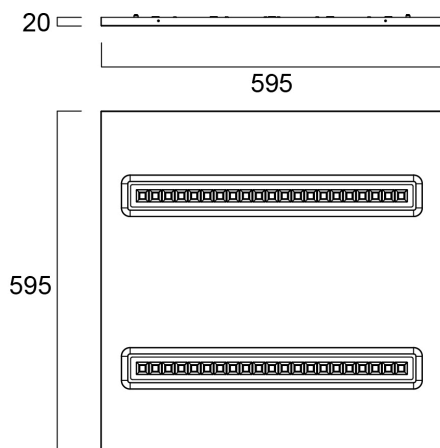

### Fotometriák

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	0.84 0.82	0.77 0.75	40.1° 39.8°	7270 1920
1.0	1.68 1.65	1.54 1.50	40.1° 39.8°	1819 488
1.5	2.53 2.47	2.31 2.25	40.1° 39.8°	809 181
2.0	3.37 3.30	3.08 2.99	40.1° 39.8°	486 152
2.5	4.21 4.12	3.81 3.69	40.1° 39.8°	291 87
3.0	5.05 4.95	4.57 4.43	40.1° 39.8°	202 47

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 78.9°)  
 — C90 - C270 (Half beam angle: 80.2°)

