

EMERGENCY PACK MANUAL TESTING 50V-200V

Item No: 0046602

SYLVANIA


PROTM



The emergency kit enables conversion of general lighting for emergency operation. It is used for driving luminaires with forward voltages (Vf) of 50V to 200V, and built-in adaptability that allows for optimum output current based on the forward voltage of the specific light engine for a more precise match to the controlled LED scheme. Features: Suitable for independent mounting, Auto load detecting, Compatible with leading brands of mains drivers, SmartCharge technology for NiMH batteries, Test-switch function, Battery deep-discharge protection, Compatible with NiMH batteries, 3-hour rated emergency duration, Supply current (max) 25mA. Ambient temperature (ta): 0°C to +35°C. Max case temperature (tc) +70°C. Conductor size : 0.2 to 1.5mm². NiMH battery. Product contains a charging regime that prolongs battery life and reduces parasitic power consumption during the product life cycle. By controlling battery temperature this results in energy saving and reduction in maintenance costs throughout the premises.

Technical Assets

Dimensions (mm)

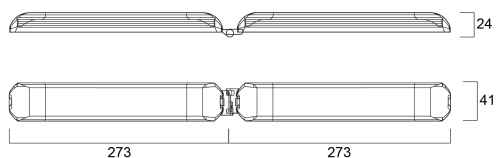

Photometrics

EMERGENCY PACK MANUAL TESTING 50V-200V

Item No: 0046602

SYLVANIA

General data

Nome do produto	EMERGENCY PACK MANUAL TESTING 50V- 200V
Tecnologia	Emergency Pack
Environment	Interior
Aplicação geral	Educação, Hotelaria, Escritórios, Retalho
ETIM	EC000471
Garantia	3 years

Physical data

Peso (kg) | 0.47

Packaging

Código EAN	5410288466026
Comprimento / altura da embalagem individual (cm)	28.5
Largura da embalagem individual (cm)	10.0
Profundidade da embalagem individual (cm)	4.5
DUN14 (inner)	05410288466026
Units per inner package	1
Unidades por embalagem exterior	25
Comprimento / altura da embalagem exterior (cm)	46.0
Largura da embalagem exterior (cm)	31.0
Profundidade da embalagem exterior (cm)	30.0

Safety data

Dry applications use only | Yes