

# Resisto 1200 IP65 5000lm 840 SSA

Item No: 0010231

**SYLVANIA**


**PRO**<sup>TM</sup>



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 5050lm; 36W; 140lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1288mm x 87mm x 80mm; D-mark; SylSmart Connected Building enabled.


## Technical Assets

### Dimensions (mm)

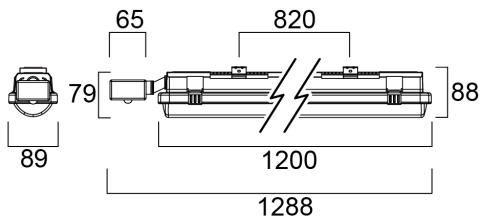

### Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.30 1.36	52° 54°	52° 54°	659 751 675
1.0	2.61 2.76	52° 54°	52° 54°	168 198 189
1.5	3.91 4.13	52° 54°	52° 54°	73 88 83
2.0	5.21 5.51	52° 54°	52° 54°	41 49 46
2.5	6.52 6.88	52° 54°	52° 54°	26 31 29
3.0	7.82 8.26	52° 54°	52° 54°	16 19 18



# Resisto 1200 IP65 5000lm 840 SSA

Item No: 0010231

**SYLVANIA**

## General data

Product name	Resisto 1200 IP65 5000lm 840 SSA
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	PIR
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

## Optical data

Fixture luminous flux (lm)	5050
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 24
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	36
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	1
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	9
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	Yes
Dimming method	SylSmart Connected (SSA)
Minimum dimming level (%)	1
Drive current (mA)	350
Inrush Current (A)	29
Inrush Duration (µs)	180
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	36
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	22
Max. products per 20A B Breaker	27
Connectable conductor cross section - Max (mm <sup>2</sup> )	2.5

# Resisto 1200 IP65 5000lm 840 SSA

Item No: 0010231

**SYLVANIA**

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

## Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK08
IK rating of sensor	IK03
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1288
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	2.33

## Packaging

Product EAN number	5410288102313
Packaging single length / height (cm)	120.5
Packaging single width (cm)	10.0
Packaging single depth (cm)	8.5
DUN14 (inner)	05410288102313
Units per outer package	1
Packaging outer length / height (cm)	120.5
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	8.5

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40