

Resisto 1500 IP66 7600lm 830

Item No: 0010241

SYLVANIA


PROTM



Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 7600lm; 55W; 138lm/W; 3000K; SDCM<5; non dimmable; CRI80; IP66; IK08; Class I; 69,000hrs (L80B20) lifespan; 1500mm x 89mm x 88mm; D-mark.


Technical Assets

Dimensions (mm)

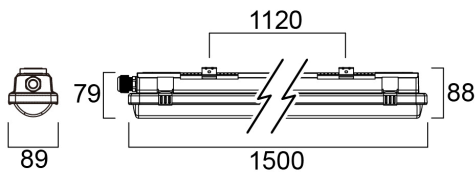

Photometrics

Distance [m]	Cone diameter [m]	Beam angle [°]	Beam diameter [m]	Illuminance [lx]
0.5	1.39 1.25	51° 52°	54.2" 51.4"	1037 1016 1254
1.0	2.77 2.51	51° 52°	54.2" 51.4"	2534 254 254
1.5	4.16 3.76	51° 52°	54.2" 51.4"	1138 113 137
2.0	5.55 5.01	51° 52°	54.2" 51.4"	634 113 137
2.5	6.93 6.26	51° 52°	54.2" 51.4"	456 113 137
3.0	8.32 7.52	51° 52°	54.2" 51.4"	352 113 137



Resisto 1500 IP66 7600lm 830

Item No: 0010241

SYLVANIA

General data

Product name	Resisto 1500 IP66 7600lm 830
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
Built in presence detector	NONE
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC002892
E-number FI	4357054
Warranty	5 years

Optical data

Fixture luminous flux (lm)	7600
Luminaire efficacy (lm/W)	138
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Distribution type	Diffuse
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Emergency type	
Total power consumption (W)	55
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	20
Electrical protection	Class I
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>50000
Dimmable	No
Dimming method	N/A
Drive current (mA)	350
Inrush Current (A)	16
Inrush Duration (µs)	40
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	24
Max. products per 13A C Breaker	32
Max. products per 16A C Breaker	39
Max. products per 20A C Breaker	49
Max. products per 10A B Breaker	24
Max. products per 13A B Breaker	32
Max. products per 16A B Breaker	39
Max. products per 20A B Breaker	49
Connectable conductor cross section - Max (mm ²)	2.5

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	69000
Lifespan L90 B10	31000

Resisto 1500 IP66 7600lm 830

Item No: 0010241



Physical data

Housing colour	Grey
IP rating	IP66
IK rating	IK08
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	87
Nominal Product Height (mm)	80
Weight (kg)	1.721

Packaging

Product EAN number	5410288102412
Packaging single length / height (cm)	155.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	9.0
DUN14 (inner)	05410288102412
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	9.0

Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-40