

# ToLEDo GLS V9 2450LM 827 E27 SL

Item No: 0030044


**SYLVANIA**



Compact and elegant design. Suitable replacement for halogen, incandescent and compact fluorescent lamps Instant light at the flick of a switch. Uniform light distribution. Good colour rendering (CRI 80). Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas. Lower maintenance costs. 15,000 hours average rated life

## Technical Assets

### Dimensions (mm)

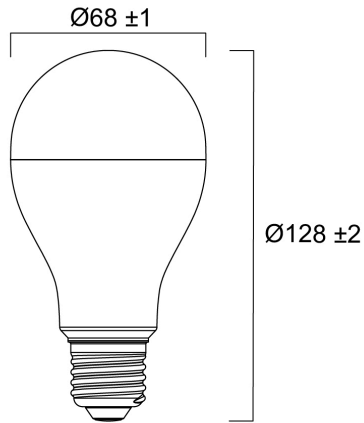

### Photometrics

# ToLEDo GLS V9 2450LM 827 E27 SL

Item No: 0030044

**SYLVANIA**

## General data

Product name	ToLEDo GLS V9 2450LM 827 E27 SL
Technology	LED
Lamp shape	Pear-shape
Cap/Base	E27
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
Virtual assistant compatibility	N/A
ETIM Class	EC001959
E-number FI	4741187
Warranty	3 years

## Optical data

Useful luminous flux ( $\Phi_{use}$ )	2450
Correlated colour temperature (k)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	150
Photobiological Risk Group	RG0

## Electrical data

Power consumption (W)	20
Wattage (W)	20
Equivalent watt (W)	125
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Drive current (mA)	155
Inrush Current (A)	7
Inrush Duration ( $\mu$ s)	420
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz

## Lifetime data

Lifespan L70 B50	15000
Average life (Rated) (h)	15000

## Physical data

Housing colour	White
IP rating	IP20
Nominal Product Height (mm)	128
Nominal Product Diameter (mm)	68
Weight (kg)	0.077

# ToLEDo GLS V9 2450LM 827 E27 SL

Item No: 0030044

**SYLVANIA**

## Packaging

Product EAN number	5410288300443
Packaging single length / height (cm)	6.9
Packaging single width (cm)	6.9
Packaging single depth (cm)	13.3
DUN14 (inner)	15410288300440
Units per outer package	6
Packaging outer length / height (cm)	21.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	14.3

## Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures