



SYLSPLASH IP65 L1200 5000LM TriTone

Item No: 0090231

SYLVANIA

YourHome™

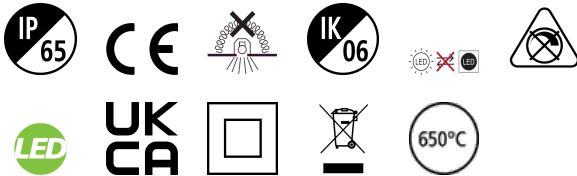

SylSplash is a slim water resistant LED integrated polycarbonate housing luminaire. With easy to access electrical terminal through bayonet lock end caps and tool-free electrical connection due to push-in terminal. Flexible installation as mounting brackets can be positioned freely on the luminaire. Colour selectable Warm White, Cool White or Daylight (3000K,4000K,6500K) controlled by wall switch. 40W; 5000lm; Efficiency with 125lm/W and 30,000 lifetime. SDCM ≤6; IP65; IK06; Class II; 1284mm x 53mm x 35mm

Technical Assets

Photometrics

General data

Product name	SYLSPLASH IP65 L1200 5000LM TriTone
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Built in presence detector	NONE
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	3 years

Optical data

Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	125
Light colour	Warm White or Neutral White or Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	125
Distribution type	Symmetric
Photobiological Risk Group	RG1

SYLSPLASH IP65 L1200 5000LM TriTone

Item No: 0090231

SYLVANIA

Electrical data

Emergency type	
Total power consumption (W)	40
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	30
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Inrush Current (A)	25
Inrush Duration (µs)	150
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	17
Max. products per 16A C Breaker	27
Max. products per 16A B Breaker	21
Connectable conductor cross section - Min (mm²)	1.0
Connectable conductor cross section - Max (mm²)	1.5

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP65
IK rating	IK06
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1284
Nominal Product Width (mm)	53
Nominal Product Height (mm)	35
Weight (kg)	0.38

Packaging

Product EAN number	5410288902319
Packaging single length / height (cm)	123.0
Packaging single width (cm)	5.3
Packaging single depth (cm)	3.5
DUN14 (inner)	15410288902316
Units per outer package	20
Packaging outer length / height (cm)	131.6
Packaging outer width (cm)	24.9
Packaging outer depth (cm)	22.5

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	-20-40