


CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B

Item No: 2064593

Concord

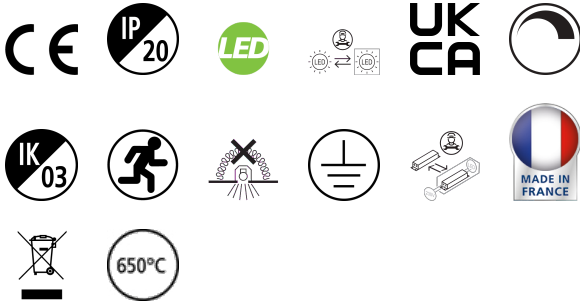

CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B is a linear luminaire for suspended mounting with 3 meter pre-wiring and complete with end caps and suspension cables, direct/indirect light distribution (60/40 ratio), compact and minimalist design, ideal for offices, meeting rooms, corridors, education facilities, museums and libraries, black (RAL9005) finishing, extruded aluminium body, 2409x56x85mm dimensions, opal diffuser, 4000K (neutral white) colour temperature, total system power: 75W, total fixture output: 10200lm, luminaire efficacy: 136lm/W, colour rendering: Ra >90, LED Chromacity: 3 step MacAdam ellipse, lifespan: 89,000 hours L80B50, operating voltage: 220-240V / 50-60Hz, drive current: 1700mA, electronic driver, DALI dimmable, 3-hours LiFePO4 integrated DALI Self Test emergency, direct/indirect independently addressable, Class I electrical protection, IP20, IK03, suitable for internal environment only.

Technical Assets

Dimensions (mm)



Photometrics

Distance [m]	Cone diameter [m]	Beam diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.23 1.31	0.71 0.74	90° 82°	8036 1110
1.0	2.45 2.62	1.42 1.48	90° 82°	2206 239
1.5	3.68 3.92	2.13 2.22	90° 82°	981 654
2.0	4.90 5.23	2.84 3.04	90° 82°	582 313
2.5	6.13 6.54	3.55 3.81	90° 82°	383 48
3.0	7.36 7.85	4.26 4.57	90° 82°	246 31

Distance [m] Cone diameter [m] Beam diameter [m] Beam angle [°] Illuminance [lx]

— C0 - C180 (Half beam angle: 105.2°)
— C90 - C270 (Half beam angle: 101.8°)



CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B

Item No: 2064593

Concord

General data

Product name	CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended, Ceiling surface mounting, Ceiling recessed mounting
Built in presence detector	NONE
Fixture rating	Enclosed
General application	Office, Education, Retail
Operating temperature range (°C)	1°C...+25°C
Virtual assistant compatibility	N/A
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	10200
Luminaire efficacy (lm/W)	136
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	255

Electrical data

Emergency mode	Maintained
Emergency type	
Emergency duration (h)	3
Total power consumption (W)	75
Supply current (A)	0.327
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.98
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	6.1
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI-2
Minimum dimming level (%)	1
Drive current (mA)	1700
Inrush Current (A)	35
Inrush Duration (µs)	170
Energy Efficiency Class (A->G) of contained light source	B
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	21
Max. products per 13A C Breaker	28
Max. products per 16A C Breaker	35
Max. products per 20A C Breaker	45
Max. products per 10A B Breaker	13
Max. products per 13A B Breaker	17
Max. products per 16A B Breaker	21
Max. products per 20A B Breaker	27
Connectable conductor cross section - Min (mm ²)	0.75
Connectable conductor cross section - Max (mm ²)	1.5

CONTINUUM PLUS 2.4 940 ST OPAL DI DALI EM B

Item No: 2064593

Concord

Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B50	89000

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Not Applicable
Nominal Product Length (mm)	2409
Nominal Product Width (mm)	56
Nominal Product Height (mm)	85
Weight (kg)	6.8

Packaging

Product EAN number	5025768645930
Packaging single length / height (cm)	251.0
Packaging single width (cm)	11.7
Packaging single depth (cm)	14.7
DUN14 (inner)	05025768645930
Units per outer package	1
Packaging outer length / height (cm)	251.0
Packaging outer width (cm)	11.7
Packaging outer depth (cm)	14.7

Safety data

Glow Wire Test (°C)	650
Optimal operating condition (°C)	1-25